

Heavy-Duty / Flash/Multi-Tone Sounder 442

Flash/Sounder WM 42 tne 115-230VAC GY/YE



Part No.: 442.130.68

211 mm
168 mm
155 mm
PC/ABS
Yellow
Grey
IP66
Screw terminals
0,25mm ² / 24AWG
1,50mm ² / 16AWG
Screwed cable gland
d = 8 mm
d = 12 mm
Present (conforms to VDE)
Wall mounting
-25°C
+75°C
2335 g
2141 g

ELECTRICAL DATA	
Operating voltage	115-230V
Operating voltage type	AC
Operating voltage frequency	50Hz at 230V 60Hz at 115V
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	80 mA
Rated inrush current	< 1A
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

OPTICAL DATA		
Light source	Xenon	
Light colour	Yellow	
Optical signal image	Flash	
Flash frequency	2 Hz	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Heavy-Duty / Flash/Multi-Tone Sounder 442

Flash/Sounder WM 42 tne 115-230VAC GY/YE

Flash output

Service life optical	5,000 h minimum	
ACOUSTIC DATA		
Volume (max) at 1m distance	120,0 dB (A)	
Acoustic signal image	Multi-tone	

3.5 J

ACOUSTIC DATA		
Volume (max) at 1m distance	120,0 dB (A)	
Acoustic signal image	Multi-tone	
Number of tones	42 tone	
Acoustic service life	5,000 h minimum	


APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	No
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Heavy-Duty / Flash/Multi-Tone Sounder 442

Flash/Sounder WM 42 tne 115-230VAC GY/YE

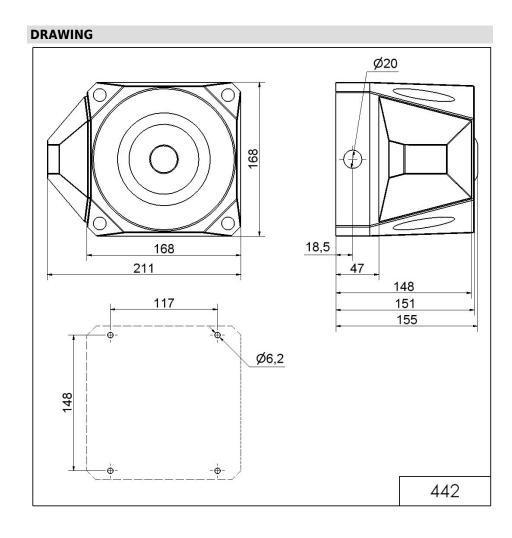

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.