

KombiSIGN 71 / LED Flashing Element 644

LED Double Flash el.. 24VDC BU



| Part No.: | 644.520.55 |
|-----------|--------------|
| Series: | KombiSIGN 71 |



| MECHANICAL DATA | | |
|-----------------------------|-------|--|
| Height | 66 mm | |
| Diameter | 70 mm | |
| Materials | PC | |
| Dome colour | Blue | |
| Protection category | IP65 | |
| Working temperature minimum | -20°C | |
| Working temperature maximum | +50°C | |
| Weight with packaging | 86 g | |
| Product weight | 71 g | |

| ELECTRICAL DATA | | |
|-----------------------------|--------------------|--|
| Operating voltage | 24V | |
| Operating voltage type | DC | |
| Operating voltage tolerance | +/- 10% | |
| Rated operational voltage | 24 VDC | |
| Rated operational current | 30 mA | |
| Rated inrush current | 500 mA | |
| Protection class | Protection class 2 | |
| Pollution degree | 3 | |

| OPTICAL DATA | |
|----------------------|------------------|
| Light source | LED |
| Light colour | Blue |
| Optical signal image | Flash |
| Flash frequency | 1 Hz |
| Service life optical | 50,000 h maximum |

| APPROVAL DATA | |
|-------------------------------|-----------------------|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.




KombiSIGN 71 / LED Flashing Element 644

LED Double Flash el.. 24VDC BU

| Conforms with CMIM | No |
|-----------------------|----|
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

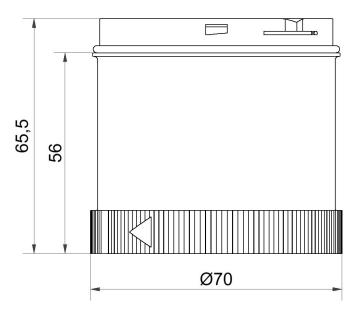

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.