

Mini installation beacon / Permanent Light 206

## Permanent Beacon EM 12-48VAC/DC RD



Part No.: 206.100.00



### MECHANICAL DATA

|                             |                   |
|-----------------------------|-------------------|
| Height                      | 87 mm             |
| Diameter                    | 57 mm             |
| Materials                   | PA-GF<br>PC       |
| Dome colour                 | Red               |
| Housing colour              | Black             |
| Protection category         | IP65              |
| Connection                  | Flat plug         |
| Type of fixing              | Built-in mounting |
| Working temperature minimum | -20°C             |
| Working temperature maximum | +50°C             |
| Weight with packaging       | 61 g              |
| Product weight              | 39 g              |

### ELECTRICAL DATA

|                             |                                |
|-----------------------------|--------------------------------|
| Operating voltage           | 12-48V                         |
| Operating voltage type      | AC/DC                          |
| Operating voltage frequency | 50Hz                           |
| Operating voltage tolerance | +/- 0%                         |
| Rated operational voltage   | 24 VDC                         |
| Protection class            | Protection class 2             |
| Pollution degree            | 3<br>In the connection area: 2 |

### OPTICAL DATA

|                      |                 |
|----------------------|-----------------|
| Light colour         | Red             |
| Service life optical | depends on bulb |

### APPROVAL DATA

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with CE              | Yes                   |
| Conforms with RoHS directive  | Yes                   |
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | cULus                 |
| UL Type Rating                | Type 12               |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Mini installation beacon / Permanent Light 206

**Permanent Beacon EM 12-48VAC/DC RD**

|                       |    |
|-----------------------|----|
| Conforms with AS-I    | No |
| ICAO Certification    | No |
| Conforms with DNV     | No |
| Conforms with RoHS CN | No |
| Conforms with VdS     | No |

**DRAWING**

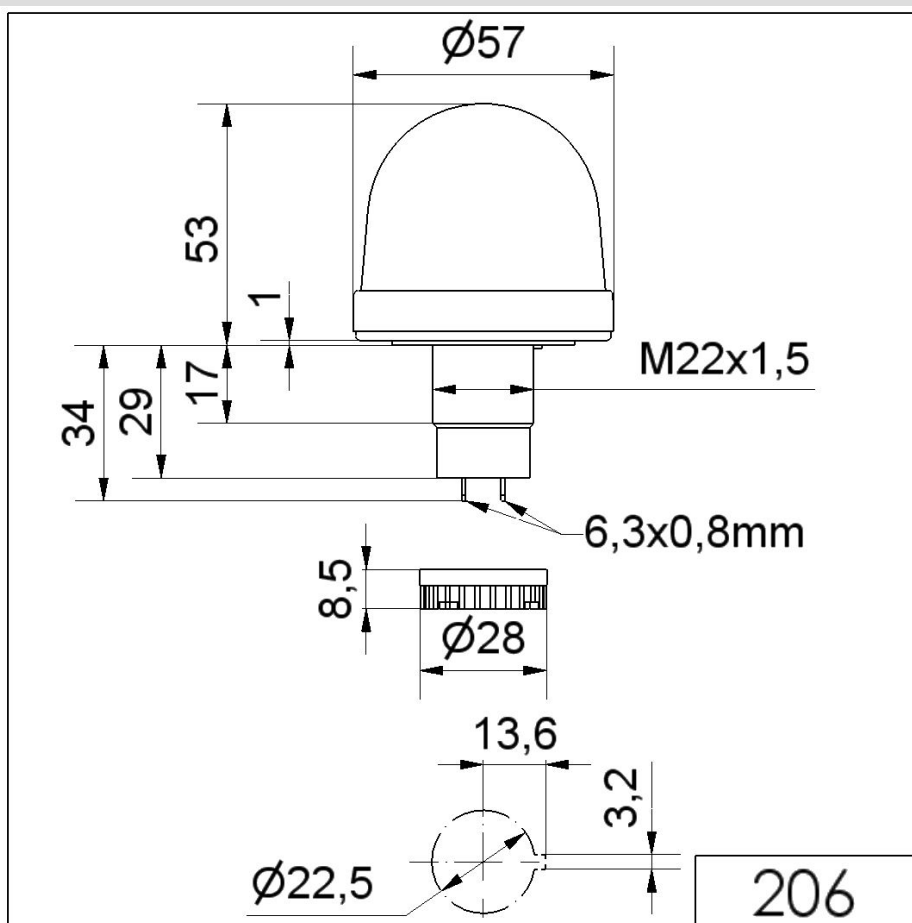

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.