

Mini / MC55

## MC55 UL Beacon + Buzzer 24V RGY M12





MECHANICAL DATA	
Height	82 mm
Diameter	55 mm
Materials	PC
Dome colour	Tranclucent
Housing colour	Black
Protection category	IP65 IP69K
Connection	M12 plug 5-pole
Type of fixing	Built-in mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	94 g
Product weight	67 g

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	65 mA	
Rated inrush current	<150mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	
Overvoltage category	I	
Isolation voltage	Ui = 50V / Uimp = 330V	

OPTICAL DATA	
Light source	LED
Light colour	MC 3 colours
Optical signal image	Permanent
Service life optical	50,000 h maximum

ACOUSTIC DATA		
Volume (max) at 1m distance	85,0 dB (A)	
Acoustic signal image	Pulse tone	
Number of tones	1 tone	
Audio frequency	3400 Hz	
Acoustic service life	5,000 h minimum	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Mini / MC55

## MC55 UL Beacon + Buzzer 24V RGY M12

APPROVAL DATA		
Conforms with CE	Yes	
Conforms with RoHS directive	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 4X	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	No	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
Conforms with DNV	No	
Conforms with RoHS CN	10 years	
Conforms with VdS	No	
MTTF-value [years]	172	


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Mini / MC55

## MC55 UL Beacon + Buzzer 24V RGY M12

## **DRAWING**

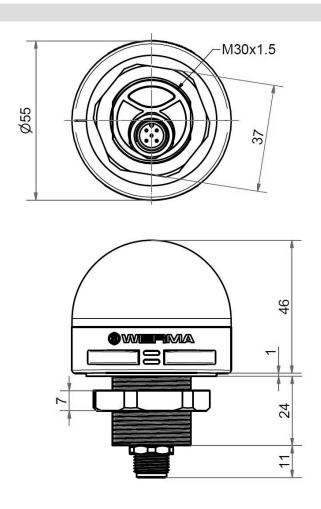

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.