

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 24VAC/DC GN/RD



Part No.:	698.320.75	_		c (UL) us
es:	Kompakt 37	Z	ः(श	Jus

MECHANICAL DATA			
Height	141 mm		
Diameter	38 mm		
Materials	PC		
Dome colour	Clear		
Housing colour	Silver		
Protection category	IP65		
Connection	Cable		
cross-sectional area maximum	0,34mm² / 22AWG		
Cable entry	Membrane grommet		
Cable entry minimum	d = 1 mm		
Cable entry maximum	d = 9 mm		
Cable length	2000 mm		
Tension relief	Pull-out protection		
Type of fixing	Built-in mounting		
Working temperature minimum	-20°C		
Working temperature maximum	+50°C		
Weight with packaging	154 g		
Product weight	123 g		

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	70 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	In the connection area: 2	

OPTICAL DATA				
Light source	LED			
Light colour	Green Red			
Optical signal image	Permanent			
Service life optical	50,000 h maximum			

APPROVAL DATA	
Conforms with CE	Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 24VAC/DC GN/RD


Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 24VAC/DC GN/RD

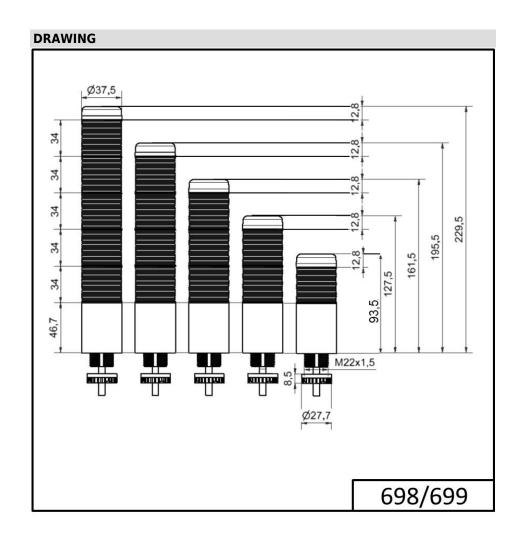

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.