

## Electromechanical Audible Signal Devices / AC Installation Buzzers 338

**Buzzer EM Contin. tone 230VAC****Part No.:** 338.373.28**MECHANICAL DATA**

|                             |                   |
|-----------------------------|-------------------|
| Length                      | 34 mm             |
| Width                       | 23 mm             |
| Height                      | 19 mm             |
| Diameter                    | 23 mm             |
| Materials                   | PA-GF             |
| Housing colour              | Black             |
| Protection category         | IP00              |
| Connection                  | Flat plug         |
| Type of fixing              | Built-in mounting |
| Working temperature minimum | -20°C             |
| Working temperature maximum | +60°C             |
| Weight with packaging       | 26 g              |
| Product weight              | 26 g              |

**ELECTRICAL DATA**

|                             |         |
|-----------------------------|---------|
| Operating voltage           | 230V    |
| Operating voltage type      | AC      |
| Operating voltage frequency | 50Hz    |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage   | 230 VAC |
| Rated operational current   | 24 mA   |
| Rated inrush current        | <500mA  |
| Pollution degree            | 2       |

**ACOUSTIC DATA**

|                             |                 |
|-----------------------------|-----------------|
| Volume (max) at 1m distance | 75,0 dB (A)     |
| Acoustic signal image       | Continuous tone |
| Audio frequency             | 100 Hz          |
| Acoustic service life       | 300 h minimum   |

**APPROVAL DATA**

|                              |                                |
|------------------------------|--------------------------------|
| Conforms with CE             | No                             |
| Conforms with RoHS directive | Fulfills substance restriction |
| WEEE                         | Yes                            |
| Conforms with ATEX-directive | No                             |
| Conforms with CCC            | No                             |
| Conforms with UL             | No                             |
| Conforms with FCC            | No                             |
| Conforms with IC             | No                             |
| EAC certificate available    | Yes                            |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Electromechanical Audible Signal Devices / AC Installation Buzzers 338

**Buzzer EM Contin. tone 230VAC**

|                               |    |
|-------------------------------|----|
| Conforms with UKCA (Importer) | No |
| Conforms with AS-I            | No |
| ICAO Certification            | No |
| Conforms with DNV             | No |
| Conforms with RoHS CN         | No |
| Conforms with VdS             | No |

**DRAWING**

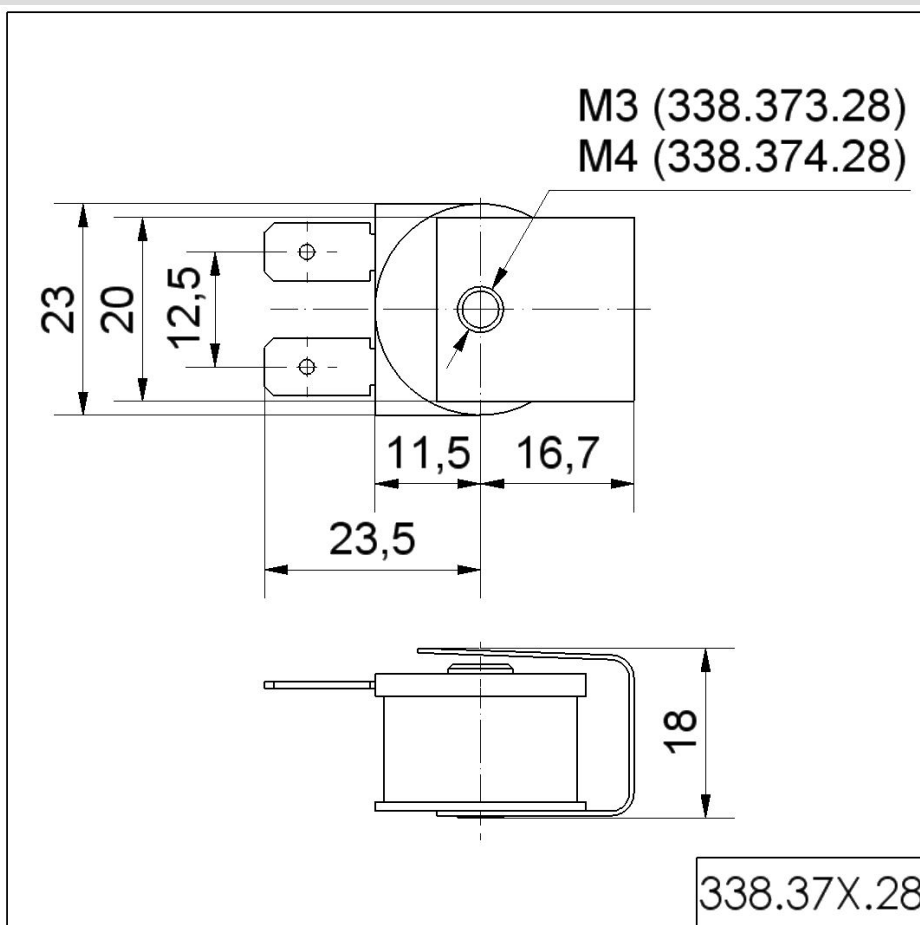

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.