

KombiSIGN 71 / Flash Beacon 643

# Flashing light element 115VAC BU



|           |              |
|-----------|--------------|
| Part No.: | 643.500.67   |
| Series:   | KombiSIGN 71 |



## MECHANICAL DATA

|                             |       |
|-----------------------------|-------|
| Height                      | 66 mm |
| Diameter                    | 70 mm |
| Materials                   | PC    |
| Dome colour                 | Blue  |
| Protection category         | IP65  |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging       | 87 g  |
| Product weight              | 72 g  |

## ELECTRICAL DATA

|                             |                          |
|-----------------------------|--------------------------|
| Operating voltage           | 115V                     |
| Operating voltage type      | AC                       |
| Operating voltage frequency | 60Hz                     |
| Operating voltage tolerance | +/- 10%                  |
| Rated operational voltage   | 115 VAC                  |
| Rated operational current   | 22 mA                    |
| Rated inrush current        | 25 mA                    |
| Protection class            | Protection class 2       |
| Pollution degree            | 3                        |
| Overvoltage category        | II                       |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V |

## OPTICAL DATA

|                      |                           |
|----------------------|---------------------------|
| Light source         | Xenon                     |
| Light colour         | Blue                      |
| Optical signal image | Flash                     |
| Flash frequency      | 1 Hz                      |
| Flash output         | 2 J                       |
| Service life optical | 4 million flashes minimum |

## APPROVAL DATA

|                              |         |
|------------------------------|---------|
| Conforms with CE             | Yes     |
| Conforms with RoHS directive | Yes     |
| WEEE                         | Yes     |
| Conforms with ATEX-directive | No      |
| Conforms with CCC            | No      |
| Conforms with UL             | cULus   |
| UL Type Rating               | Type 12 |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Flash Beacon 643

## Flashing light element 115VAC BU

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM            | No                    |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |

### DRAWING

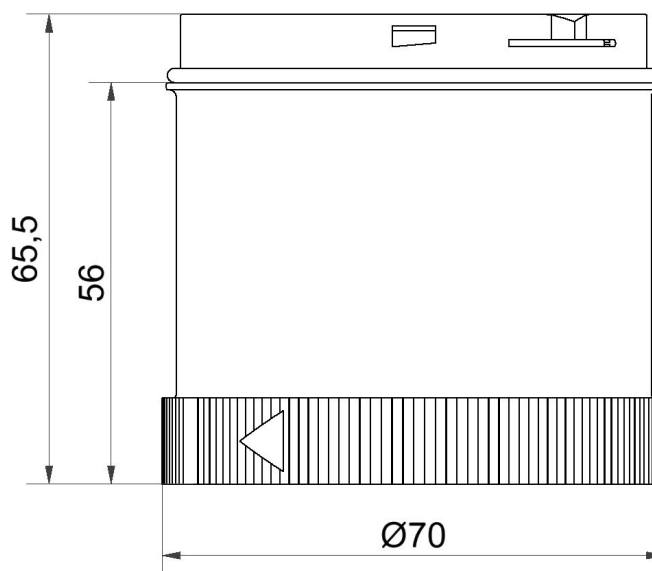

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.