

Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren BK



Part No.:	657.600.55
Series:	eSIGN

MECHANICAL DATA	
Height	372 mm
Diameter	72 mm
Materials	PC
Dome colour	Tranclucent
Housing colour	Black
Protection category	IP66 IP69K
Connection	M12 plug 8-pole
Type of fixing	Base mounting Tube mounting
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	849 g
Product weight	792 g
IK-Code (IEC 62262)	IK08

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	620 mA
Rated inrush current	800 mA
Protection class	Protection class 3
Pollution degree	3
Overvoltage category	I
Isolation voltage	Ui = 50V / Uimp = 330V
Request to external PSU	SELV/PELV
connectivity	Digital entrance USB

OPTICAL DATA				
Light source	LED			
Light colour	MC >1.000.000 colours			
Optical signal image	Blink Double flash Flash Permanent Revolving Triple flash			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren BK

Configurable
50,000 h maximum
105 dB
Multi-tone
10 tone
5,000 h minimum
Yes
Yes
Yes
No
No
No
cULus
Type 4/4X/12/13
No
No
No
Yes (WERMA (UK) Ltd.)
No
No
No
No

No

31

Conforms with VdS


MTTF-value [years]

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren BK

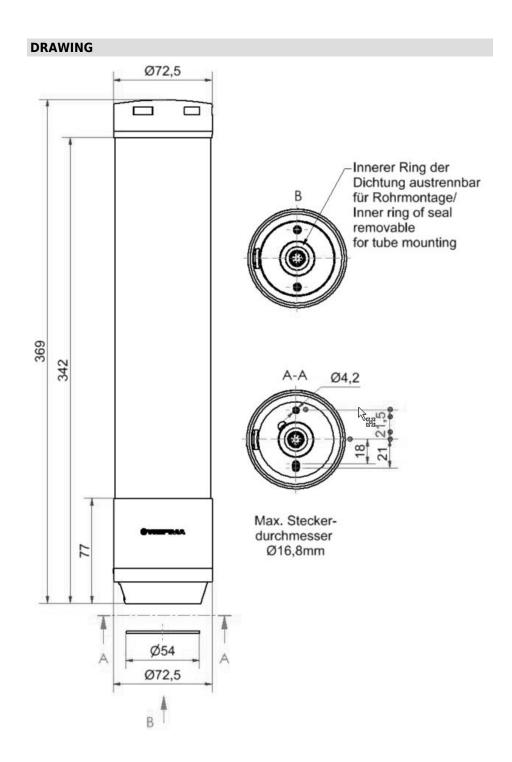

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.